


SMA6J SERIES

SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR

STAND-OFF VOLTAGE 5.0 - 130 Volts

600 Watt Peak Pulse Power

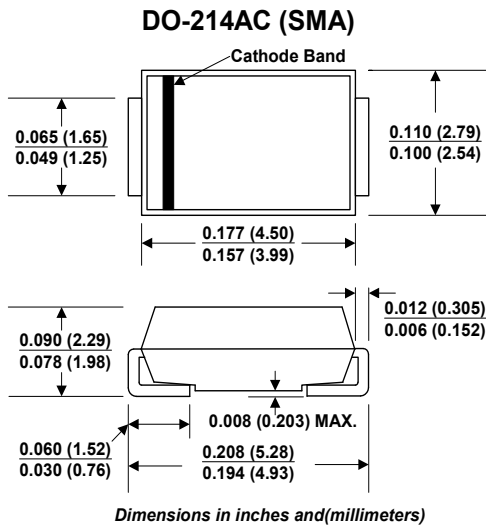

FEATURES

- ⊙ For surface mounted applications in order to optimize board space
- ⊙ Halogen-Free
- ⊙ RoHS compliant
- ⊙ Typical maximum temperature coefficient $\Delta V_{BR}=0.1\% \times V_{BR} @ 25^{\circ}\text{C} \times \Delta T$
- ⊙ Low profile package
- ⊙ Built-in strain relief
- ⊙ Glass passivated junction
- ⊙ Low inductance
- ⊙ Excellent clamping capability
- ⊙ Repetition Rate (duty cycle): 0.01%
- ⊙ Fast response time: typically less than 1.0ps from 0 Volts to V_{BR}
- ⊙ Typical IR less than 1uA above 12V
- ⊙ High Temperature soldering: 260°C/40 seconds at terminals
- ⊙ Plastic package has Underwriters Laboratory Flammability 94V-0
- ⊙ Matte Tin Lead-free plated

MECHANICAL DATA

Case: JEDEC DO214AC. Molded plastic over glass passivated junction

Terminal: Solderable per MIL-STD-750, Method 2026

Polarity: Color band denoted positive end (cathode) except Bidirectional

Standard Packaging: 12mm tape (EIA STD RS-481)

Weight: 0.002 ounce, 0.063gram

DEVICES FOR BIPOLAR APPLICATION

For Bidirectional use CA Suffix for types SMA6J5.0A thru types SMA6J130A (e.g. SMA6J5.0CA , SMA6J90CA)

Electrical characteristics apply in both directions

MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

RATING	SYMBOL	VALUE	UNITS
Peak Pulse Power Dissipation on 10/1000μs waveform (Note 1,2 ,FIG.1)	P_{PPM}	Minimum 600	Watts
Peak Pulse Current of on 10/1000μs waveform (Note 1,FIG.3)	I_{PPM}	SEE TABLE 1	Amps
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed on Rated Load, (JEDEC Method) (Note 2,3)	I_{FSM}	65	Amps
Operating junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	°C

Notes :

1. Non-repetitive current pulse , per Fig. 3 and derated above $T_A = 25^{\circ}\text{C}$ per Fig. 2 .
2. Mounted on 5.0mm x 5.0mm (0.03mm thick) Copper Pads to each terminal
3. 8.3ms single half sine-wave , or equivalent square wave, Duty cycle = 4 pulses per minutes maximum.

SMA6J SERIES
SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR
STAND-OFF VOLTAGE 5.0 - 130 Volts
600 Watt Peak Pulse Power

SMA6J PART NUMBER		DEVICE MARKING CODE		REVERSE STAND- OFF VOLTAGE V _{RWM} (V)	BREAKDOWN VOLTAGE V _{BR} (V) @I _T		TEST CURREN T I _T (mA)	MAXIMUM CLAMPING VOLTAGE @I _{pp} V _C (V) (10/1000uS)	PEAK PULSE CURRENT I _{pp} (A) (10/1000uS)	MAXIMUM CLAMPING VOLTAGE @I _{pp} V _C (V) (8/20uS)	PEAK PULSE CURRENT I _{pp} (A) (8/20uS)	REVERSE LEAKAGE @ V _{RWM} I _R (μA)
UNI- POLAR	BI-POLAR	UNI	BI		MIN	MAX						
SMA6J5.0A	SMA6J5.0CA	KE	TE	5.0	6.40	7.00	10	9.2	65.3	12.0	326.5	800.0
SMA6J6.0A	SMA6J6.0CA	KG	TG	6.0	6.67	7.37	10	10.3	58.3	13.4	291.5	800.0
SMA6J6.5A	SMA6J6.5CA	KK	TK	6.5	7.22	7.98	10	11.2	53.6	14.6	268.0	500.0
SMA6J7.0A	SMA6J7.0CA	KM	TM	7.0	7.78	8.60	10	12.0	50.0	15.6	250.0	200.0
SMA6J7.5A	SMA6J7.5CA	KP	TP	7.5	8.33	9.21	1	12.9	46.6	16.8	233.0	100.0
SMA6J8.0A	SMA6J8.0CA	KR	TR	8.0	8.89	9.83	1	13.6	44.2	17.7	221.0	50.0
SMA6J8.5A	SMA6J8.5CA	KT	TT	8.5	9.44	10.40	1	14.4	41.7	18.7	208.5	20.0
SMA6J9.0A	SMA6J9.0CA	KV	TV	9.0	10.00	11.10	1	15.4	39.0	20.0	195.0	10.0
SMA6J10A	SMA6J10CA	KX	TX	10.0	11.10	12.30	1	17.0	35.3	22.1	176.5	5.0
SMA6J11A	SMA6J11CA	KZ	TZ	11.0	12.20	13.50	1	18.2	33.0	23.7	165.0	1.0
SMA6J12A	SMA6J12CA	LE	UE	12.0	13.30	14.70	1	19.9	30.2	25.9	151.0	1.0
SMA6J13A	SMA6J13CA	LG	UG	13.0	14.40	15.90	1	21.5	28.0	28.0	140.0	1.0
SMA6J14A	SMA6J14CA	LK	UK	14.0	15.60	17.20	1	23.2	25.9	30.2	129.5	1.0
SMA6J15A	SMA6J15CA	LM	UM	15.0	16.70	18.50	1	24.4	24.6	31.7	123.0	1.0
SMA6J16A	SMA6J16CA	LP	UP	16.0	17.80	19.70	1	26.0	23.1	33.8	115.5	1.0
SMA6J17A	SMA6J17CA	LR	UR	17.0	18.90	20.90	1	27.6	21.8	35.9	109.0	1.0
SMA6J18A	SMA6J18CA	LT	UT	18.0	20.00	22.10	1	29.2	20.6	38.0	103.0	1.0
SMA6J20A	SMA6J20CA	LV	UV	20.0	22.20	24.50	1	32.4	18.6	42.1	93.0	1.0
SMA6J22A	SMA6J22CA	LX	UX	22.0	24.40	26.90	1	35.5	16.9	46.2	84.5	1.0
SMA6J24A	SMA6J24CA	LZ	UZ	24.0	26.70	29.50	1	38.9	15.5	50.6	77.5	1.0
SMA6J26A	SMA6J26CA	ME	WE	26.0	28.90	31.90	1	42.1	14.3	54.7	71.5	1.0
SMA6J28A	SMA6J28CA	MG	WG	28.0	31.10	34.40	1	45.4	13.3	59.0	66.5	1.0
SMA6J30A	SMA6J30CA	MK	WK	30.0	33.30	36.80	1	48.4	12.4	62.9	62.0	1.0
SMA6J33A	SMA6J33CA	MM	WM	33.0	36.70	40.60	1	53.3	11.3	69.3	56.5	1.0
SMA6J36A	SMA6J36CA	MP	WP	36.0	40.00	44.20	1	58.1	10.4	75.5	52.0	1.0
SMA6J40A	SMA6J40CA	MR	WR	40.0	44.40	49.10	1	64.5	9.3	83.9	46.5	1.0
SMA6J43A	SMA6J43CA	MT	WT	43.0	47.80	52.80	1	69.4	8.7	90.2	43.5	1.0
SMA6J45A	SMA6J45CA	MV	WV	45.0	50.00	55.30	1	72.7	8.3	94.5	41.5	1.0
SMA6J48A	SMA6J48CA	MX	WX	48.0	53.30	58.90	1	77.4	7.8	100.6	39.0	1.0
SMA6J51A	SMA6J51CA	MZ	WZ	51.0	56.70	62.70	1	82.4	7.3	107.1	36.5	1.0
SMA6J54A	SMA6J54CA	NE	XE	54.0	60.00	66.30	1	87.1	6.9	113.2	34.5	1.0
SMA6J58A	SMA6J58CA	NG	XG	58.0	64.40	71.20	1	93.6	6.5	121.7	32.5	1.0
SMA6J60A	SMA6J60CA	NK	XK	60.0	66.70	73.70	1	96.8	6.2	125.8	31.0	1.0
SMA6J64A	SMA6J64CA	NM	XM	64.0	71.10	78.60	1	103.0	5.9	133.9	29.5	1.0
SMA6J70A	SMA6J70CA	NP	XP	70.0	77.80	86.00	1	113.0	5.3	146.9	26.5	1.0
SMA6J75A	SMA6J75CA	NR	XR	75.0	83.30	92.10	1	121.0	5.0	157.3	25.0	1.0
SMA6J78A	SMA6J78CA	NT	XT	78.0	86.70	95.80	1	126.0	4.8	163.8	24.0	1.0
SMA6J85A	SMA6J85CA	NV	XV	85.0	94.40	104.00	1	137.0	4.4	178.1	22.0	1.0
SMA6J90A	SMA6J90CA	NX	XX	90.0	100.00	111.00	1	146.0	4.1	189.8	20.5	1.0
SMA6J100A		NZ		100.0	111.00	123.00	1	162.0	3.7	210.6	18.5	1.0
SMA6J110A		PE		110.0	122.00	135.00	1	177.0	3.4	230.1	17.0	1.0
SMA6J120A		PG		120.0	133.00	147.00	1	193.0	3.1	250.9	15.5	1.0
SMA6J130A		PK		130.0	144.00	159.00	1	209.0	2.9	271.7	14.5	1.0

For bidirectional type having V_{rw} of 10 volts and less, the IR limit is double.

SMA6J SERIES

RATINGS AND CHARACTERISTIC CURVES

Ratings and

Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig. 1 - Peak Pulse Power Rating

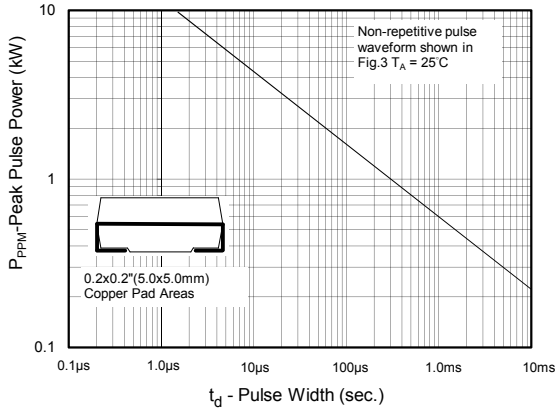


Fig.2 - Pulse Derating Curve

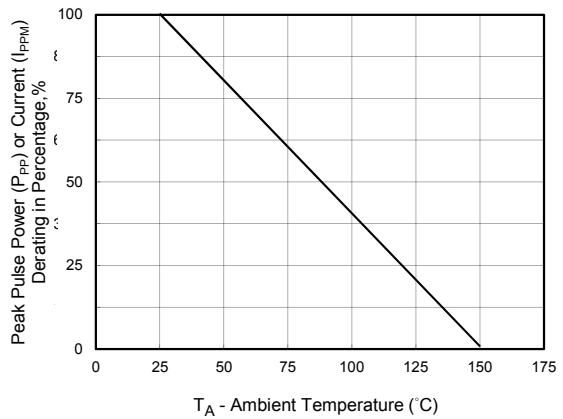


Fig.3 - Pulse Waveform

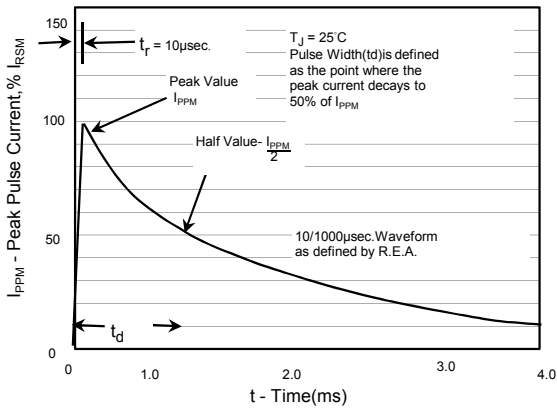


Fig. 4 - Typical Junction Capacitance

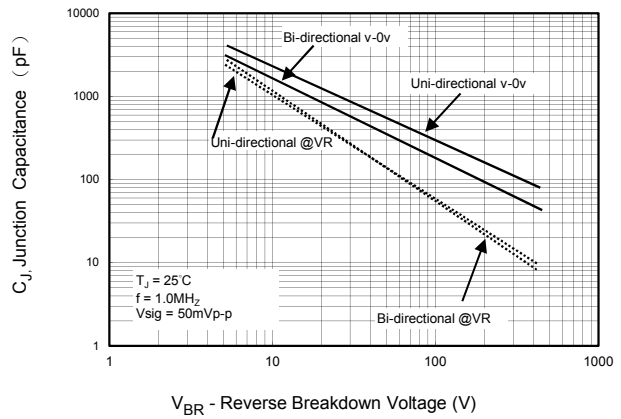


Fig. 5 - Steady State Power Derating Curve


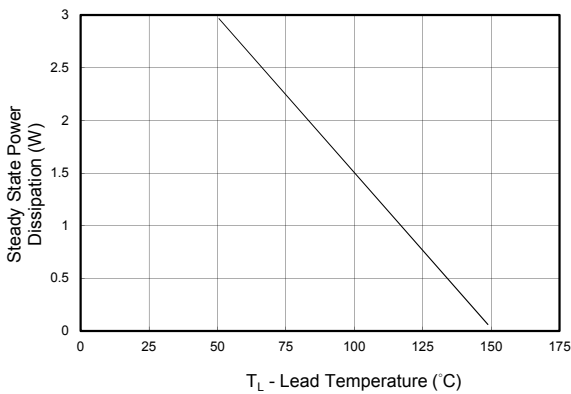



Fig.6 - Maximum Non-repetitive Forward Surge current uni-directional only

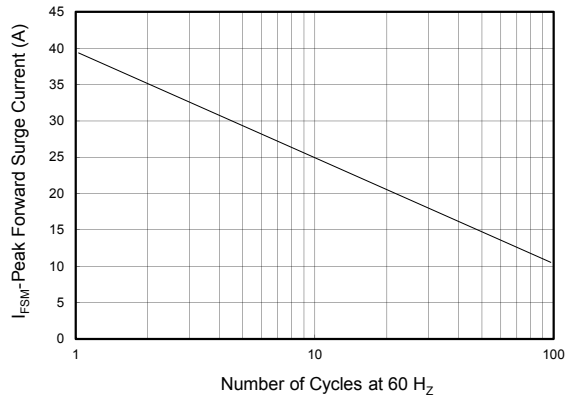


SMA6J SERIES

SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR

Part Numbering System

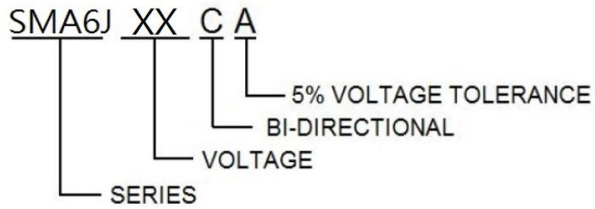

Part Marking System

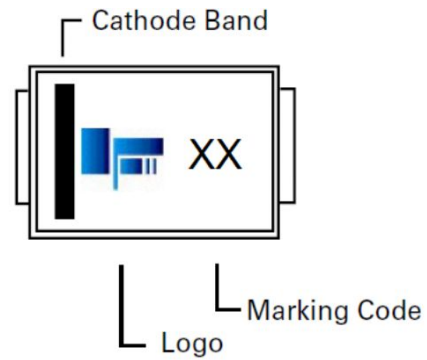

Packaging

Part number	Component Package	Quantity	Packaging Option	Packaging Specification
SMA6JxxxA	DO-214AC	5000	Tape & Reel - 12mm/13" tape	EIA STD RS-481
SMA6JxxxA	DO-214AC	1000	Tape & Reel - 12mm/ 7" tape	EIA STD RS-481